



HIGH PEAK & STAFFORDSHIRE MOORLANDS BUILDING CONTROL SERVICES



THE BUILDING REGULATIONS 2010 THE REPLACEMENT OF WINDOWS AND DOORS

I thought replacing windows and doors did not need Building Regulation approval?

For many years, it had not been necessary to apply for Building Regulation approval when replacing windows in existing dwellings unless a structural alteration was involved. This usually only occurred when the existing opening was being made wider, which made the installation of a new support lintel necessary. That has changed.

All owners replacing windows and glazed doors need to make an application, and the new windows themselves will have to fully meet the requirements of the Building Regulations. So even if you are replacing only one window or any door with a glazed area more 50 % with one brought from a local DIY centre you still need to follow the guidance below.

What do I have to do?

You have a choice, you can either -

1. Use an installer registered under the FENSA scheme run by the Glass and Glazing federation, in which case you do not need to make a Building Regulations application to the Council. Your installer should then ensure your windows comply fully with the Regulations and will supply you with a certificate confirming this when the installation is complete. If you wish to use this option please ensure that your installer is properly registered under the scheme before placing an order. You can check this and find more details of the scheme by visiting the Glass and Glazing federation website at www.ggf.org.uk
2. Make a Building Regulations application, and in most cases the simplest way of doing this will be to submit a Building Notice. You must complete the Building Notice form, and return it to us together with the appropriate charge **at least** two working days before removing the old window(s).

Once we receive the Building Notice, a Building Control Surveyor may visit your property. A Certificate of Installation will be issued once the information provided by the installer is considered satisfactory. You may well be asked by your solicitor to produce this Certificate if you sell your property.

How much will it cost?

If you use a contractor registered under the FENSA scheme the cost should be built into the quotation for the works you are given. In all other cases an application will be needed and charges for this can be found on our website or by phoning the council.

What regulations do the windows have to comply with?

Thermal insulation

The replacement windows and doors will need to meet the thermal insulation requirements of the regulations.

Insulation Standards For New and Replacement Windows and Doors	
Fitting	Standard
Window, Roof window or Roof light	1.6W/m²K, or WER Band C
Doors with more than 50 % of internal face Glazed	1.8 W/m²K
Other Doors (no application required)	1.8 W/m²K


Take great care when ordering new windows that your supplier can **prove** the glazing units used will satisfy this requirement, as the Building Control Surveyor will need to see this proof before issuing a completion certificate.

In some cases it may be permissible to use glazing units which do not meet the above specifications, but to do so you (or your supplier) would have to submit calculations to prove that the overall insulation requirements of the regulations would still be met. This may be possible if other insulation measures are undertaken at the same time as the window replacement - for example "topping up" loft insulation. The benefits gained by installing this extra insulation can be used to offset the higher losses through the glazing, but this should not be undertaken lightly. We would strongly advise you get any such calculations checked by a Building Control Surveyor well before the replacement windows are installed, so that expensive mistakes can be avoided.

GUIDANCE NOTES

Means of escape

All first floor windows in dwellings should ideally have opening lights large enough to allow you to escape through them if you were trapped in the room by a fire. This also applies to rooms in bungalows which open into a hall (unless the hall itself has an external door through which you could escape). To meet this requirement all such windows should have an unobstructed openable area of at least 0.33m^2 and be not less than 450mm high and 450mm wide (the route through the window may be at an angle rather than straight through). The bottom of the openable area should be less than 1100mm above the floor.

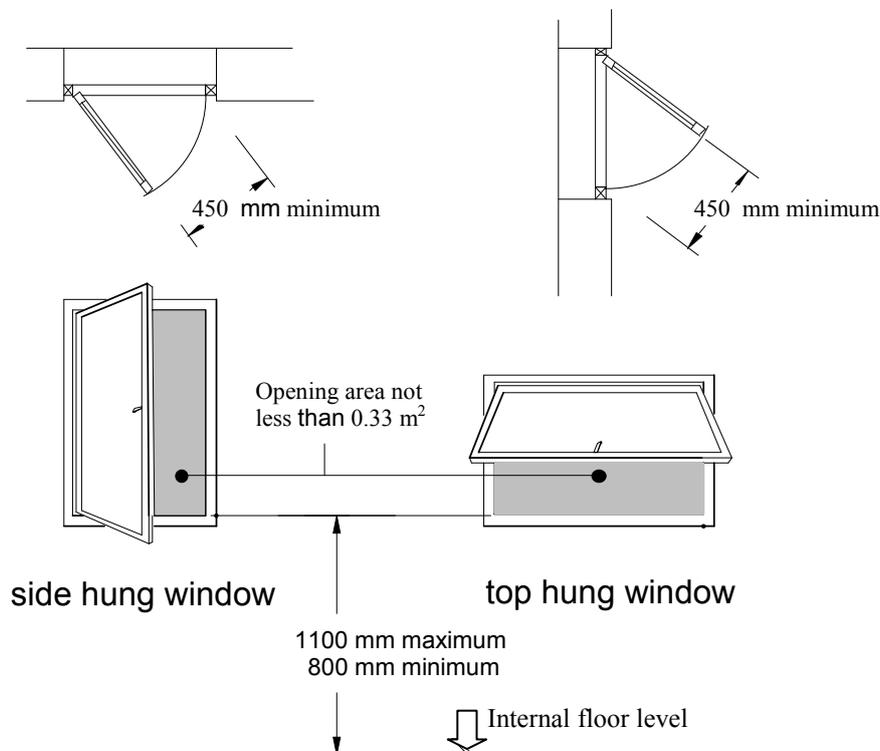

If your existing windows do not have opening lights which meet the above requirements, we would strongly recommend for your own safety, that you take the opportunity to provide them in the replacement windows. This is not a however a requirement of the regulations, which simply state that the replacement windows must be no worse than those they replace in this respect. Where the existing windows already have opening lights which are larger than the above requirements, those in the new windows can be reduced in size provided they are not reduced to less than the dimensions above.

Safety Glazing

Low level glazing (glazed areas within 800mm of floor level) and glazing in doors within 1500mm of floor level should generally be of a type so that if broken, it will break safely. In practice this means such glazing should be either laminated or toughened. Ordinary glazing can still be used in small pane sizes however, provided the glass is sufficiently strong to resist breakage. The Approved Document to part N of the Building Regulations gives maximum sizes according to the thickness of glass - for example, in a single pane less than 1.1m^2 - 8mm glass would be satisfactory.

Structural safety

If the replacement windows are wider than those they replace, this will be classed as a structural alteration and will need and application based on an estimate of the cost of works.

If the works involve the replacement of bay windows, then the installer or Building Control Officer will need to be satisfied that proper structural support is provided above the window. In older buildings, the timber frame of the window was often sufficiently strong to carry the load of a wall or roof above it without a lintel. Obviously in these cases either a lintel needs to be installed when the window is replaced, or the new frame carefully reinforced to carry the load.

Ventilation

The Building Regulations require that adequate ventilation is provided for people in the building and this should be considered when deciding on the size of opening lights in the replacement windows. For most rooms, one or more opening windows totalling 5% of the floor area, with background "trickle" vents totalling 8000mm^2 will be adequate. For kitchens, utility rooms and bathrooms an extract fan is also normally required.

In some cases the existing windows may contain a permanent vent to supply combustion air to a heating appliance, although this is now rare. If this is the case however you should ensure that either the replacement window contains a similar permanent vent, or that some other means of providing the required ventilation is installed at the same time.